


## Geberit AquaClean Mera Care Mera WC complete solution, floor-standing WC



Example image

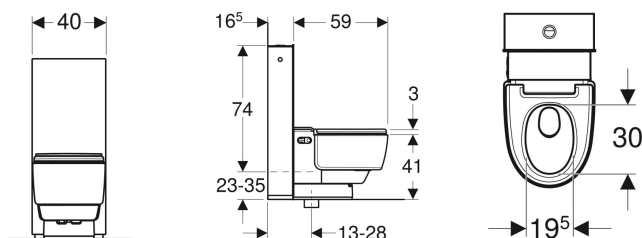

### Application purposes

- For convenient and odourless toilet use
- For gently cleaning the anal and vaginal areas with water

### Characteristics

- Hybrid hot water system with continuous flow heater and storage water heater
- Anal shower with double-nozzle WhirlSpray shower technology
- Separate Lady shower nozzle in protected park position
- Adjustable shower water temperature
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Washdown WC with special glaze KeraTect
- User detection
- Odour extraction unit with run-on function
- Odour extraction with ceramic honey comb filter can be activated
- Dryer can be activated
- Dryer air intensity can be set to 5 positions
- Dryer arm can be extended
- Adjustable dryer temperature
- WC seat ring with soft-closing mechanism
- WC seat ring, fixed, for absorption of lateral forces
- Premounted sound insulation
- Functions and settings via remote control
- Four user profiles can be programmed
- Compatible with Geberit Home App
- External water supply connection, possible with accessories

- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- External mains connection with power outlet on the right possible
- With integrated exposed cistern
- Seat height adjustable between 44 and 56 cm
- Toilet flush can be triggered by remote control
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

### Technical data

Protection degree	IPX4
Nominal voltage (V AC)	230 V AC
Mains frequency (Hz)	50 Hz
Power consumption standby (W) - max.	0.5 W
Flow pressure (bar) - min. to max.	0.5–10 bar
Operating temperature (°C) - min. to max.	5–40 °C
Water temperature, adjustment range (°C) - min. to max.	34–40 °C
Flush volume, factory setting (l)	6 / 4 l
Calculated flow rate (l/s)	0.03 l/s
Minimum flow pressure for calculated flow rate (bar)	0.5 bar
Spray time (s)	30–50 s
Load WC seat (kg) - max.	190 kg
Odour extraction unit	Yes
SoftOpening	No
With WC seat ring heating	No
With orientation light	No
With dryer functionality	Yes

### Scope of delivery

- Female socket for mains connection
- Spray shield
- Descaling agent, 125 ml
- Cleaning set
- Connection set for WC, ø 90 mm
- Remote control with wall-mounted case and battery CR2032
- Fastening material
- Wall-mounted control panel for touchless activation

Art. no.	Publication.ColourSurface	B / width (cm)	H / height (cm)	T / depth (cm)	Protection class	Power consumption (W)
146.242.11.1	WC ceramic appliance: white / KeraTect Design cover: white Cladding flushing cistern: high-pressure laminate white	40 cm	44 cm	59 cm	I	2000 W

### Accessories

- Geberit S-bend set for floor-standing WC



- 
- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at [www.geberit.com](http://www.geberit.com).
  - This product is only available via the Geberit Care Team. Please contact us for more information.